




FAHRENHEIT THROUGH BODY PORCELAIN MATTE - RECTIFIED



0F Cool

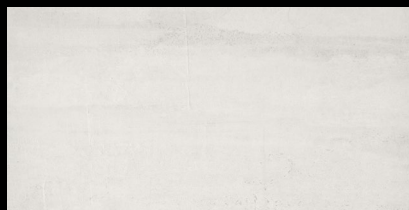


350F Frost



450F Heat



500F Heat

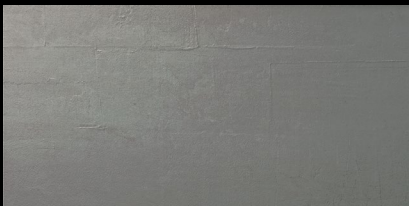

300F Frost



250F Frost

RETAIL PRICING LISTED

| Stocked Sizes | Price /sf | Price /pc |
|---------------|-----------|-----------|
| 24" x 24" | \$10.95 | \$43.80 |
| 24" x 48" | \$12.95 | \$103.60 |


For more info, visit: www.amestile.com/fahrenheit

Minimalist tones in heat and frost linked by a cool white, Fahrenheit is a collection of shades influenced by colour palettes.

FAHRENHEIT SERIES



0F Cool



350F Frost



450F Heat



500F Heat




300F Frost



250F Frost



0F Cool

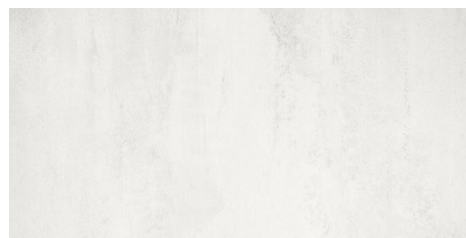


350F Frost



450F Heat



500F Heat

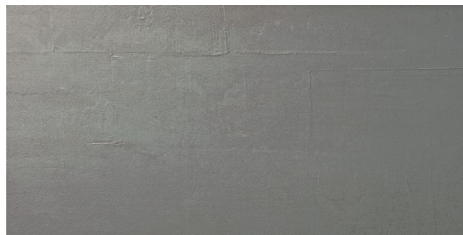

300F Frost



250F Frost

| | 24" x 24" | 24" x 48" |
|-------------------|-----------|------------|
| \$ / sf | \$10.95 | \$12.95 |
| \$ / ea | \$43.80 | \$103.60 |
| 0F COOL | FA00CM24 | FA00CM2448 |
| 250F FROST | FA25FM24 | FA25FM2448 |
| 300F FROST | FA30FM24 | FA30FM2448 |
| 350F FROST | FA35FM24 | FA35FM2448 |
| 450F HEAT | FA45HM24 | FA45HM2448 |
| 500F HEAT | FA50HM24 | FA50HM2448 |

Alternate sizes, textures, décor and trim pieces may also be available for special order. Contact your sales consultant for more information.

RECOMMENDED APPLICATIONS

| | | Shower | Steam Shower | Fireplace / Feature Wall | Light Commercial | Medium Commercial | Heavy Commercial | Indoor | Outdoor |
|-------|-------|--------|--------------|--------------------------|------------------|-------------------|------------------|--------|---------|
| Matte | WALL | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FLOOR | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Recommended applications do not include consideration of any technical installation requirements or safety standards for slopes and pool decks. All tile products and setting materials should be selected and installed in compliance with manufacturers specifications and applicable use standards.

TECHNICAL SPECIFICATIONS

| V Rating (Variation) | Breaking Strength (ISO 10545-4) | Resistance to Deep Abrasion (ISO 10545-6) | Slip Resistance | Frost Resistance (ISO 10545-12) | Country of Origin | Ecotile |
|---------------------------------|---------------------------------|--|----------------------|---------------------------------|-----------------------|------------------|
| V2 - Slight Variation | — | 140 mm ³ | DCOF >0.55 / R10 | Yes | Germany | Yes |
| Number of Faces | Thickness | Resistance to Surface Abrasion (ISO 10545-7) | Moisture Rating (MR) | MOHS (Hardness Scale) | PEI (Wear Resistance) | Recycled Content |
| 24" x 24" - 16 24" x 48" - 8 | 8mm | — | 1 - Impervious | — | — | 40% Pre-consumer |

All images are for reference only and may not match physical product exactly. All sizing is nominal and all product specifications are supplied by the manufacturer and are subject to change by the manufacturer without notice to you or to Ames Tile & Stone Ltd. Ames makes no representations or warranties as to the specifications of any product. Prices are subject to change without notice; please contact your Ames Sales Consultant for current prices.



Inspire. Design. Create.
www.amestile.com/fahrenheit

Shading and variation is inherent in ceramics and natural stone.
Please inspect before installing, no claims accepted after installation.