




# ENERGY 2.5 SERIES

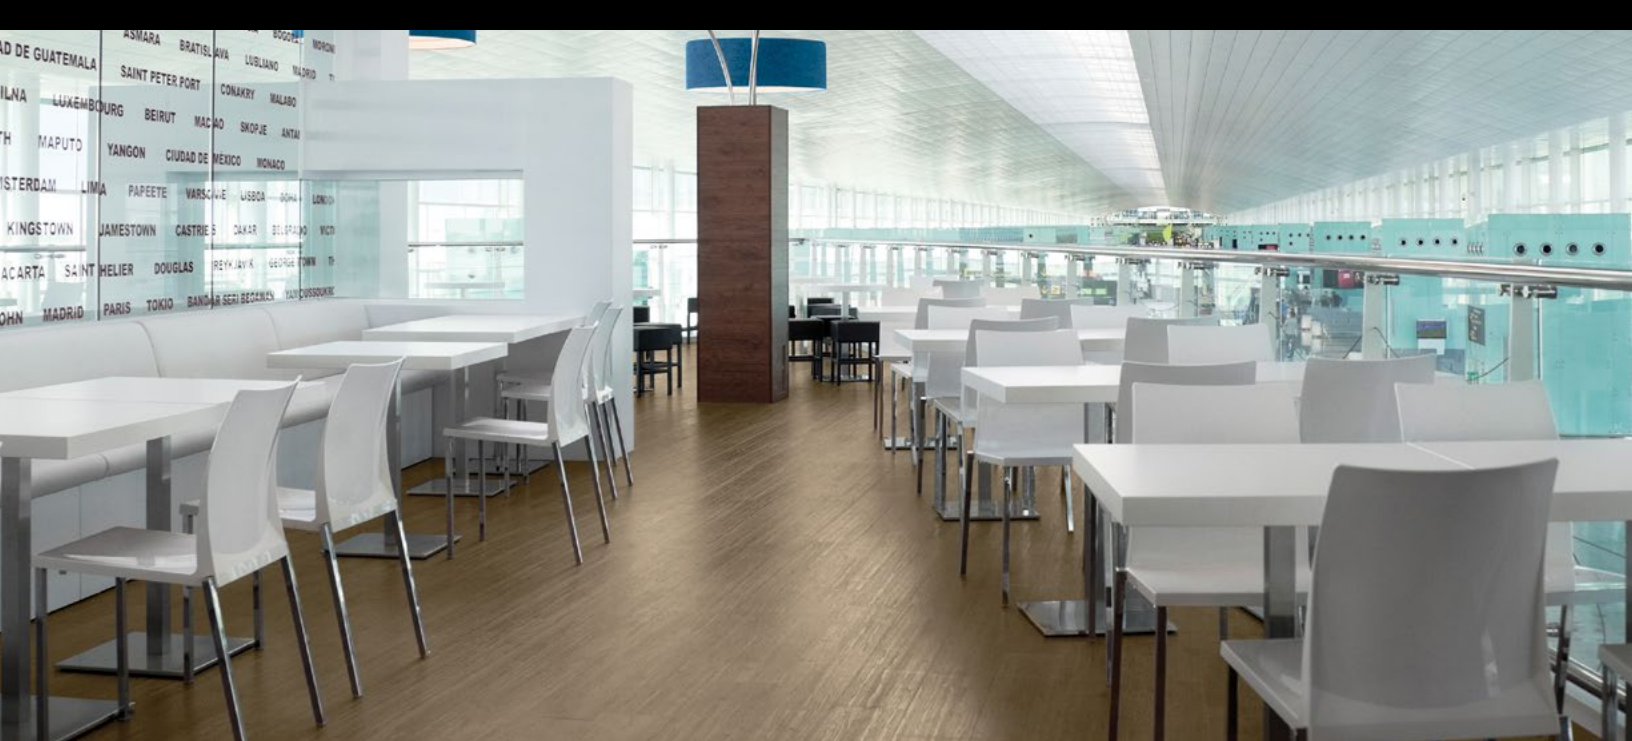

## ENERGY 2.5 VINYL FLOORING

12" x 36"



**Battleship**  
**VYEB1236**



**Drift**  
**VYEDR1236**




**Iron**  
**VYEIR1236**



**Snowfall**  
**VYESF1236**



**Truffle**  
**VYETF1236**



**Tweed**  
**VYETD1236**

### RETAIL PRICING LISTED

Stocked Sizes	Price /sf	Price / box
12" x 36"	\$3.95	\$213.30
7.25" x 48"	\$3.95	\$171.83

For more info, visit:  
[www.amestile.com/energy25](http://www.amestile.com/energy25)

7.25" x 48"



**Baja** **VYEBJ748**




**Bluff** **VYEBF748**



**Camel** **VYECM748**



**Caramel** **VYECR748**



**Caskwood** **VYECD748**



**Fossil** **VYEF748**



**Hyde** **VYEHY748**



**Lead** **VYELD748**



**Sea Salt** **VYESS748**



**Shark Skin** **VYESK748**








**Silver Cloud** **VYESC748**













**Oysterwood** **VYEO748**

# ENERGY 2.5 SERIES













## Technical Data and Options

	Overall Thickness	0.098" (2,5 mm)	
	Wear Layer Thickness	0.020" (0,50 mm)	
	Plank Size	7.25" x 48" (18,4 cm x 122 cm)	Tile Size : 12" x 36" (30.5 cm x 91,4 cm)
	Packaging	18 planks/43.5 Sq.f./38.9 lbs (17.67 Kg)/Box	18 tiles/54 Sq.f./48.7 lbs (22,08 Kg)/Box
	Installation	Full Spread Adhesives	




## Construction

	ASTM F1700, Class III, Type B	Section 5.5.1 Commercial Applications    	
	100% Pure solid vinyl	100% Recyclable	
	Printed design	Hi-Definition natural visual and embossing options	
	Bevel edge profile	Four Sides	
	Phthalate Safe	EN 14372	Compliant
	Anti-Bacterial	ASTM G21 No Growth	Compliant
	Maintnace	UV-urethane antimicrobial, durable finish for a no wax easy maintenance	

## Performance

	Abrasion resistance	ASTMD 4060	EN 660-2 Group T	Excellent
	Static Load Limit / Indentation	ASTM F970	1000 PSI	Exceeds 250 PSI
	Resistance Castor Chair	EN 425 : suitable for office chairs with castors		Pass
	Dimensional Stability	ASTM F2199	Excellent	Pass
	Chemical Resistance	ASTM F925	Excellent	Pass
	Resistance to Radiant Heat	EN 12524	0.25 W/mK, Max 77° F (25° C)	Suitable for heated floors
	Impact Insulation Class	ISO 717-2	6 dB	Meets
	Sound Transmission Class	NF S 31-074	Class B	Meets
	Slip Resistance	ASTM D2047	ADA Requirement	Exceeds
	Fire Test Data – Flame Spread	ASTM E648	0.45 watt/cm <sup>2</sup> or more	Class I
	Fire Test Data – Smoke Evolution	ASTM E662	450 or less	Meets
	Fire Test Data – Canada	CAN/ULC S-102.2	CDN Building Code	Compliant

## Supplement and Environment

	Indoor Air Quality	FloorScore	Certification Guidelines	SCS-EC10.3 2014
	Certified Low Emitting Adhesives	SCAQMD	Rule #1168	Meets
	Plants Certifications	ISO 14001, ISO 9002, OHSAS 18001		Certified

## Limited Warranty

	15 year Commercial / Lifetime residential			
---	---	--	--	--