

# INSPIRE

SPC COMPOSITE FLOORING



Inspire. Design. Create.  
[www.amestile.com/inspire](http://www.amestile.com/inspire)



Saltwood **IPSAW748**



Dune **IPDUN748**



Winter Wheat **IPWTW748**



Barley **IPBAR748**



Willow **IPWIL748**



Greyrock **IPGRY748**



Vinewood **IPVNW748**

RETAIL PRICING LISTED		
Stocked Sizes	Price /sf	Price /box
7" x 48"	\$4.95	\$140.43

## Stair Nosing

5<sup>1</sup>/<sub>8</sub>" x 94<sup>1</sup>/<sub>2</sub>" - Nosing L = 1" Nosing W = 5/8"



Saltwood **IPSAWSN**



Willow **IPWIL748SN**



Dune **IPDUNSN**



Greyrock **IPGRYSN**



Winter Wheat **IPWTWSN**



Vinewood **IPVNWSN**



Barley **IPBARSN**




Resistance to Radiant Heat

In slab, radiant heat only.  
 Cannot use with mat, mesh  
 or cable radiant heat  
 (i.e. Nuheat & Ditra-Heat).

RETAIL PRICING LISTED	
Stocked Sizes	Price / piece
Stair Nosing	\$69.95

## Technical Specifications

<b>Style / Installation</b>	Hardwood Design planks with Drop Lock CLIC floating acoustic installation system.
<b>Standard</b>	ASTM F1700, Class III, Type B
<b>Total Thickness</b>	5.5mm
<b>Wear Layer</b>	0.50mm (0.020")
<b>Sizes: Planks</b>	7"x 48" (180mm x 1220mm)
<b>Packaging: Plank / Box</b>	12
<b>Coverage: Sq.ft. / Box</b>	28.37
<b>Weight: Box</b>	47.80lbs (21.70 kg)
<b>Surface Finish</b>	PUR   UV PurKleen™ Protection: No Wax, No Spray Buff, for the life of the product
<b>Chemical &amp; Stain Resistance</b>	ASTM F925-13: Pass
<b>Abrasion Resistance</b>	ASTM D4060-14: Scratch Resistance
<b>Slip Resistance</b>	ASTM D2047-17: Meets or exceeds the industry recommendations for flat surfaces / R10
<b>Static Load Resistance</b>	ASTM F970-15: Pass
<b>Wheel Castor Resistance</b>	ASTM D4060-14: Comply- Suitable for office chairs with castors
<b>Dimensional Stability</b>	ASTM F2199-14: Pass
<b>Thermal Conductivity</b>	Suitable for heated floors max 28OC (82OF)
<b>Impact Insulation Class</b>	ASTM E989: 73 IIC
<b>Sound Transmission Class</b>	ASTM E413: 67 STC
<b>Flame Spread &amp; Smoke Development</b>	Compliant with: CAN/ULC-S103.2/ASTM E648 Class 1 / ASTM E662 < 450
<b>Micro-Organism Resistance</b>	ASTM G21-15: Bacteriostat, no growth
<b>Indoor Air Quality, VOC Emission</b>	Phthalate Free / Compliant with FloorScore Requirements
<b>Low Emitting Material</b>	EN 71-3: In Compliance with CDPH/EHLB Standard Method
<b>Recycling</b>	100% Recyclable
<b>Plants Certification</b>	ISO 9002, ISO 14001, OHSAS 18001
<b>Health &amp; Safety</b>	Complies with CE Regulation
<b>Limited Warranty</b>	Residential: Lifetime

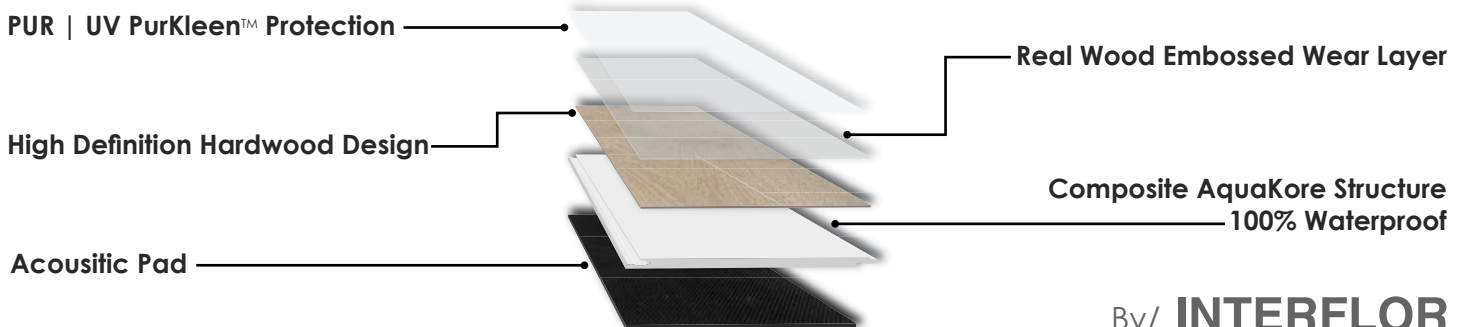

By/ **INTERFLOR**