



# ULTRA 5.0 SERIES



## ULTRA 5.0 VINYL FLOORING



Buckskin **VYUBK948**



Coastal Path **VYUCH948**




Elkhorn **VYUEH948**



Fieldstone **VYUFD948**



Horizon **VYUHR948**

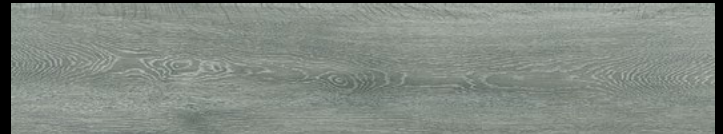

Riverrock **VYURR948**



Tundra **VYUTU948**



Timberwolf **VYUTW948**








Whitecliff **VYUWC948**

RETAIL PRICING LISTED		
Stocked Sizes	Price /sf	Price /box
9" x 48"	\$4.95	\$118.80











For more info, visit: [www.amestile.com/ultra50](http://www.amestile.com/ultra50)

# ULTRA 5.0 SERIES













## Technical Data and Options

	Overall Thickness	0.197" (5,0 mm)	
	Wear Layer Thickness	0.020" (0,50 mm)	
	Plank Size	9" x 48" (22.9 cm x 122 cm)	
	Packaging	8 planks/24 Sq.f./49.5 lbs (22.5 Kg)/Box	
	Installation	Full Spread and Perimeter Glue	




## Construction

	ASTM F1700, Class III, Type B	Section 5.5.1 Commercial Applications    	
	100% Pure solid vinyl	Reinforced with fiber glass grid, 100% Recyclable	
	Printed design	Hi-Definition natural visual and embossing options	
	Bevel edge profile	Four Sides	
	Phthalate Safe	EN 14372	Compliant
	Anti-Bacterial	ASTM G21 No Growth	Compliant
	Maintenance	UV-urethane antimicrobial, durable finish for a no wax easy maintenance	

## Performance

	Abrasion resistance	ASTM D4060	EN 660-2 Group T	Excellent
	Static Load Limit / Indentation	ASTM F970	1000 PSI	Exceeds 250 PSI
	Resistance Castor Chair	EN 425 : suitable for office chairs with castors		Pass
	Dimensional Stability	ASTM F2199	Excellent	Pass
	Chemical Resistance	ASTM F925	Excellent	Pass
	Resistance to Radiant Heat	EN 12524	0.25 W/mK, Max 77° F (25° C)	Suitable for heated floors
	Impact Insulation Class (IIC)	ASTM E989 (ASTM E492)	IIC 73	Exceeds
	Sound Transmission Class (STC)	ASTM E90 (ASTM E413)	STC 67	Exceeds
	Slip Resistance	ASTM D2047	ADA Requirement	Exceeds
	Fire Test Data – Flame Spread	ASTM E648	0.45 watt/cm <sup>2</sup> or more	Class I
	Fire Test Data – Smoke Evolution	ASTM E662	450 or less	Meets
	Fire Test Data – Canada	CAN/ULC S-102.2	CDN Building Code	Compliant

## Supplement and Environment

	Indoor Air Quality	FloorScore	Certification Guidelines	SCS-EC10.3 2014
	Certified Low Emitting Adhesives	SCAQMD	Rule #1168	Meets
	Plants Certifications	ISO 14001, ISO 9002, OHSAS 18001		Certified

## Limited Warranty

	15 year Commercial / Lifetime residential			
--	---	--	--	--