



ULTRA 5.0

ULTRA 5.0 SERIES




ULTRA 5.0 VINYL FLOORING



Tundra **VYUTU948**



Coastal Path **VYUCH948**

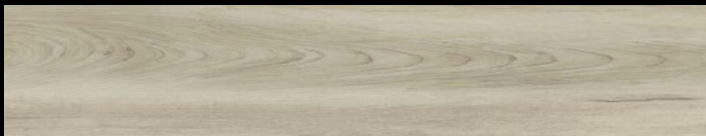

Elkhorn **VYUEH948**




Horizon **VYUHR948**



Buckskin **VYUBK948**



Fieldstone **VYUFD948**

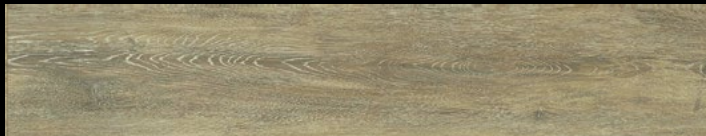

Whitecliff **VYUWC948**



Riverrock **VYURR948**








Timberwolf **VYUTW948**

| RETAIL PRICING LISTED | | |
|-----------------------|-----------|------------|
| Stocked Sizes | Price /sf | Price /box |
| 9" x 48" | \$4.95 | \$118.80 |











For more info, visit: www.amestile.com/ultra50

ULTRA 5.0 SERIES













Technical Data and Options

| | | |
|--|----------------------|--|
|  | Overall Thickness | 0.197" (5,0 mm) |
|  | Wear Layer Thickness | 0.020" (0,50 mm) |
|  | Plank Size | 9" x 48" (22.9 cm x 122 cm) |
|  | Packaging | 8 planks/24 Sq.f./49.5 lbs (22.5 Kg)/Box |
|  | Installation | Full Spread and Perimeter Glue |




Construction

| | | | |
|--|-------------------------------|---|-----------|
|  | ASTM F1700, Class III, Type B | Section 5.5.1 Commercial Applications     | |
|  | 100% Pure solid vinyl | Reinforced with fiber glass grid, 100% Recyclable | |
| | Printed design | Hi-Definition natural visual and embossing options | |
|  | Bevel edge profile | Four Sides | |
|  | Phthalate Safe | EN 14372 | Compliant |
|  | Anti-Bacterial | ASTM G21 No Growth | Compliant |
|  | Maintenance | UV-urethane antimicrobial, durable finish for a no wax easy maintenance | |

Performance

| | | | | |
|--|----------------------------------|--|-----------------------------------|----------------------------|
|  | Abrasion resistance | ASTM D4060 | EN 660-2 Group T | Excellent |
|  | Static Load Limit / Indentation | ASTM F970 | 1000 PSI | Exceeds 250 PSI |
|  | Resistance Castor Chair | EN 425 : suitable for office chairs with castors | | Pass |
|  | Dimensional Stability | ASTM F2199 | Excellent | Pass |
|  | Chemical Resistance | ASTM F925 | Excellent | Pass |
|  | Resistance to Radiant Heat | EN 12524 | 0.25 W/mK, Max 77° F (25° C) | Suitable for heated floors |
|  | Impact Insulation Class (IIC) | ASTM E989 (ASTM E492) | IIC 73 | Exceeds |
|  | Sound Transmission Class (STC) | ASTM E90 (ASTM E413) | STC 67 | Exceeds |
|  | Slip Resistance | ASTM D2047 | ADA Requirement | Exceeds |
|  | Fire Test Data – Flame Spread | ASTM E648 | 0.45 watt/cm ² or more | Class I |
|  | Fire Test Data – Smoke Evolution | ASTM E662 | 450 or less | Meets |
|  | Fire Test Data – Canada | CAN/ULC S-102.2 | CDN Building Code | Compliant |

Supplement and Environment

| | | | | |
|--|----------------------------------|----------------------------------|--------------------------|-----------------|
|  | Indoor Air Quality | FloorScore | Certification Guidelines | SCS-EC10.3 2014 |
|  | Certified Low Emitting Adhesives | SCAQMD | Rule #1168 | Meets |
|  | Plants Certifications | ISO 14001, ISO 9002, OHSAS 18001 | | Certified |

Limited Warranty

| | |
|--|---|
|  | 15 year Commercial / Lifetime residential |
|--|---|