





Linea

Glazed Ceramic Wall Tile - Rectified

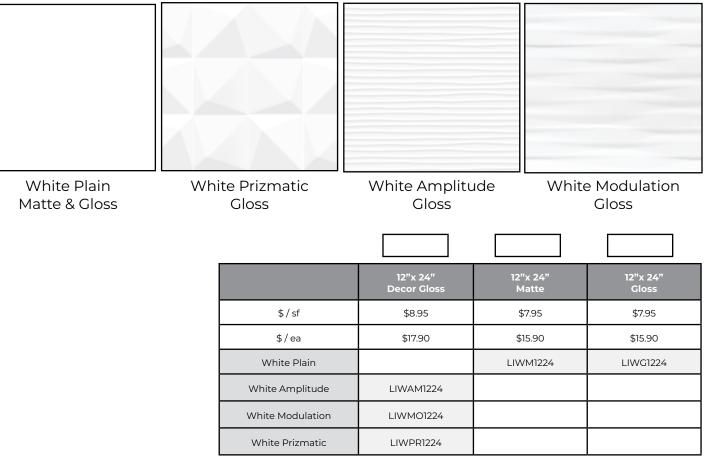

 Alternate sizes, textures, décor and trim pieces may also be available for special order. Contact your sales consultant for more information.

Shading and variation is inherent in ceramics and natural stone. Please inspect before installing, no claims accepted after installation.

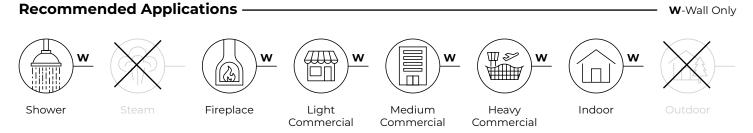

Caution: Dark grout on light coloured tiles can scratch or stain the surface, please test a separate area before grouting your space.

Technical specifications

| V Rating (Variation) | Breaking Strength (ISO 10545-4) | Resistance to Deep Abrasion (ISO 10545-6) | Slip Resistance | Frost Resistance (ISO 10545-12) | Country of Origin | Ecotile |
|-------------------------|------------------------------------|---|-------------------------|------------------------------------|--------------------------|------------------|
| VI - Uniform Appearance | _ | _ | _ | No | Turkey | No |
| Number of Faces | Thickness | Resistance to Surface Abrasion (ISO 10545-7) | Moisture Rating (MR) | MOHS (Hardness Scale) | PEI (Wear Resistance) | Recycled Content |
| 1 | Matte 9mm Glossy 10mm | — | MR4 | _ | _ | _ |

All images are for reference only and may not match physical product exactly. All product specifications are supplied by the manufacturer and are subject to change by the manufacturer without notice to you or to Ames Tile & Stone Ltd. Ames makes no representations or warranties as to the specifications of any product. Prices are subject to change without notice; please contact your Ames Sales Consultant for current prices.



Inspire, Design, Create. www.amestile.com/linea