# Pietra di Ostuni

Glazed Porcelain
Wall & Floor Tile

The sun stone – Inspired by the ancient homes of salento.
Stones come back to life in original and contemporary colours.

ecotile

Avorio Grigio Sabbia Tufo

| Stocked Sizes | Price /sf | Price /pc |
|---|---|---|
| 8 x 8" Matte | $12.95 | $5.57 |
| 8"x 16" Matte | $12.95 | $11.15 |
| 16"x 16" Matte | $12.95 | $22.31 |
| 16"x 24" Matte | $12.95 | $33.46 |

**Grigio** **New*

**Tufo**

**Sabbia**

AMES TILE & STONE

ROOM VISUALIZER

*All images are for reference only and may not match physical product exactly. Shading and variation is inherent in ceramics and natural stone. Please inspect all products before installing, no claims accepted after installation.*

# Pietra di Ostuni

Glazed Porcelain
Wall & Floor Tile

8 x 16”

Avorio
**PDAVM1624**

Grigio
**PDGGM816**

Sabbia
**PDSAM816**

Tufo
**PDTUM816**

16 x 16”

Avorio
**PDAVM16**

Grigio
**PDGGM16**

Sabbia
**PDSAM16**

Tufo
**PDTUM16**

16 x 24”

Avorio
**PDAVM1624**

Grigio
**PDGGM1624**

Sabbia
**PDSAM1624**

Tufo
**PDTUM1624**

| | 8 x 8” | 8 x 16” | 16 x 16” | 16 x 24” |
|---|---|---|---|---|
| **$ / sf** | $12.95 | $12.95 | $12.95 | $12.95 |
| **$ / ea** | $5.57 | $11.15 | $22.31 | $33.46 |
| **Avorio** | **PDAVM8** | **PDAVM816** | **PDAVM16** | **PDAVM1624** |
| **Grigio** | **PDGGM8** | **PDGGM816** | **PDGGM16** | **PDGGM1624** |
| **Sabbia** | **PDSAM8** | **PDSAM816** | **PDSAM16** | **PDSAM1624** |
| **Tufo** | **PDTUM8** | **PDTUM816** | **PDTUM16** | **PDTUM1624** |

**Caution: Dark grout on light coloured tiles can scratch or stain the surface, please test a separate area before grouting your space.**

All sizes are approximate and items are sold by piece.

8 x 8”

Avorio
**PDAVM8**

Grigio
**PDGGM8**

Sabbia
**PDSAM8**

Tufo
**PDTUM8**

## Recommended Applications

W*
F[1]

Shower

F
W

Steam

W
F

Light Commercial

W
F

Medium Commercial

W

Heavy Commercial

W
F

Residential

W
F

Outdoor

Recommended applications do not include consideration of any technical installation requirements or safety standards for slopes and pool decks. All tile products and setting materials should be selected and installed in compliance with manufacturers specifications and applicable use standards.
* W – Wall, [1] F – Floor only

## Technical Specifications

| V Rating (Variation) | Breaking Strength (ISO 10545-4) | Resistance to Deep Abrasion (ISO 10545-6) | Slip Resistance | Frost Resistance (ISO 10545-12) | Country of Origin | Ecotile |
|---|---|---|---|---|---|---|
| V4 – Substantial Variation | >1300 N | <175mm³ | >0.55 / R10 | Yes | Italy | Yes |
| **Number of Faces** | **Thickness** | **Resistance to Surface Abrasion (ISO 10545-7)** | **Moisture Rating (MR)** | **MOHS (Hardness Scale)** | **PEI (Wear Resistance)** | **Recycled Content** |
| 15 – 30 | 9 mm | — | — | — | — | 19% Pre-consumer |

Product specifications are supplied by the manufacturer and are subject to change without notice. AMES makes no representations or warranties as to the specifications of any product. Prices are subject to change without notice; please contact your AMES Sales Consultant for current prices.

AMES TILE & STONE

ROOM VISUALIZER

*All images are for reference only and may not match physical product exactly. Shading and variation is inherent in ceramics and natural stone. Please inspect all products before installing, no claims accepted after installation.*

# Pattern Inspiration




**1** 8 x 8” – 20%
**2** 16 x 16” – 80%




**1** 8 x 8” – 33.3%
**2** 16 x 16” – 66.7%

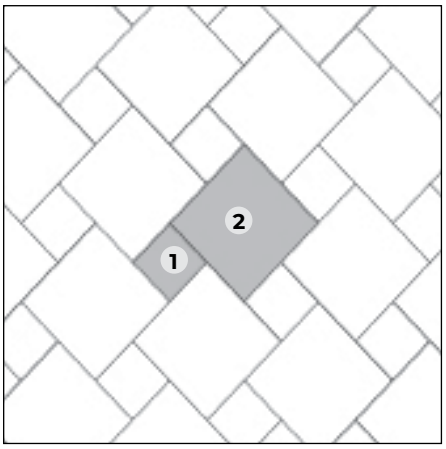


**1** 8 x 16” – 42.86%
**2** 16 x 16” – 57.14%

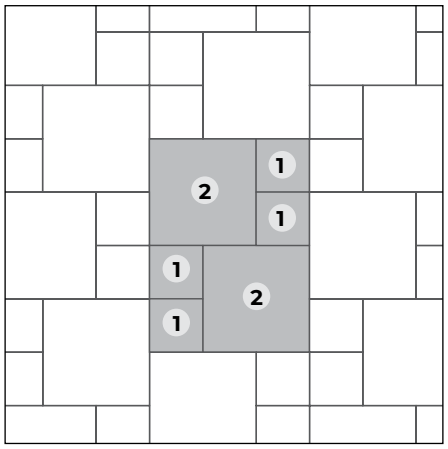


**1** 8 x 8” – 14.29%
**2** 8 x 16” – 28.57%
**3** 16 x 16” – 57.14%

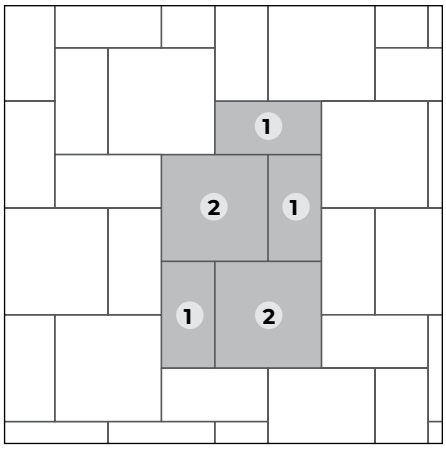


**1** 8 x 16” – 33.33%
**2** 16 x 16” – 66.94%

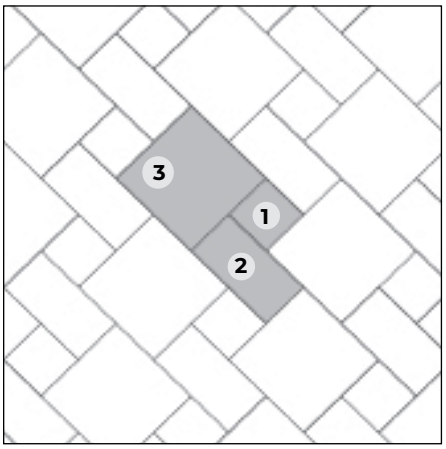


**1** 8 x 8” – 11.12%
**2** 8 x 16” – 22.22%
**3** 16 x 16” – 66.66%

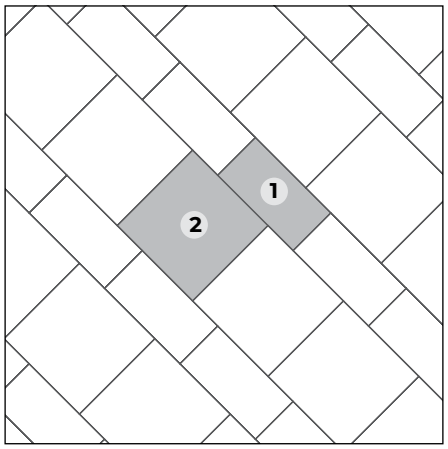


**1** 8 x 16” – 7.14%
**2** 16 x 16” – 28.57%
**3** 16 x 24” – 64.29%

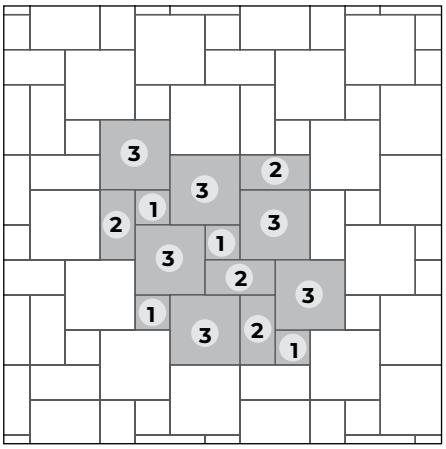


**1** 8 x 16” – 12.50%
**2** 16 x 16” – 50.00%
**3** 16 x 24” – 37.50%

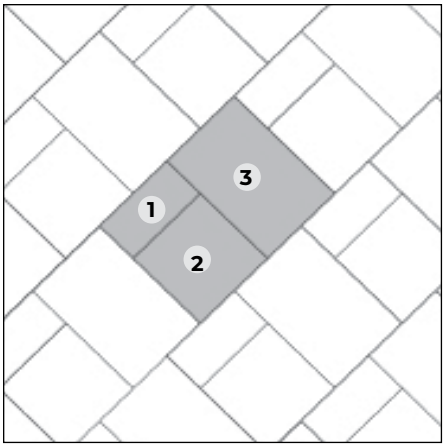


**1** 8 x 8” – 7.69%
**2** 8 x 16” – 15.38%
**3** 16 x 16” – 30.77%
**4** 16 x 24” – 46.15%

AMES TILE & STONE

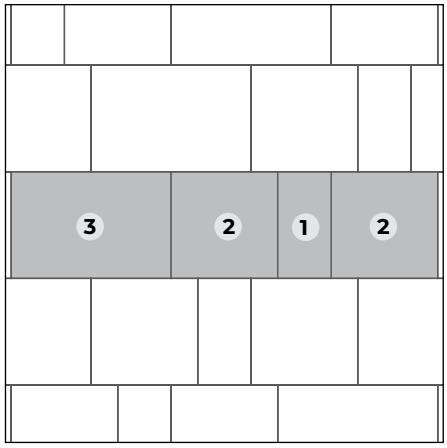ROOM VISUALIZER

*All images are for reference only and may not match physical product exactly. Shading and variation is inherent in ceramics and natural stone. Please inspect all products before installing, no claims accepted after installation.*
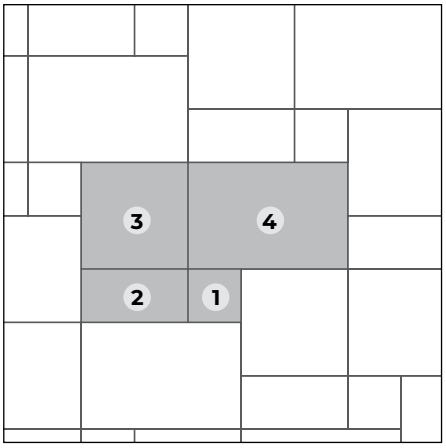
# Pattern Inspiration




| | |
|---|---|
| **1** | 8 x 8” – 12% |
| **2** | 8 x 16” – 24% |
| **3** | 16 x 16” – 16% |
| **4** | 16 x 24” – 48% |




| | |
|---|---|
| **1** | 8 x 8” – 5% |
| **2** | 8 x 16” – 25% |
| **3** | 16 x 16” – 40% |
| **4** | 16 x 24” – 30% |

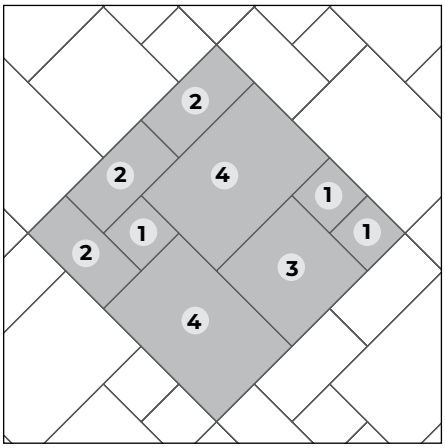


| | |
|---|---|
| **1** | 8 x 8” – 11.11% |
| **2** | 8 x 16” – 11.11% |
| **3** | 16 x 16” – 44.44% |
| **4** | 16 x 24” – 33.33% |

Colour variations, as seen in examples above, also add to the natural beauty of this series.

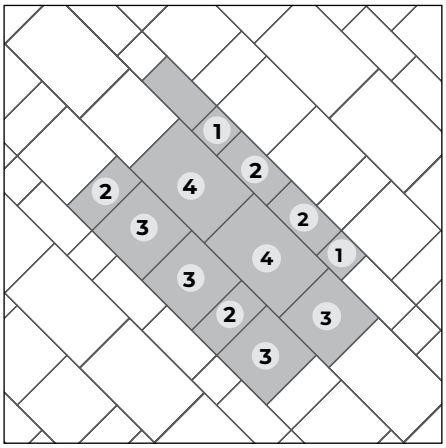Please inspect tiles and have your installer do a dry layout of your desired installation with a 3 – 5mm grout joint for approval prior to install.

No claims will be accepted after install.

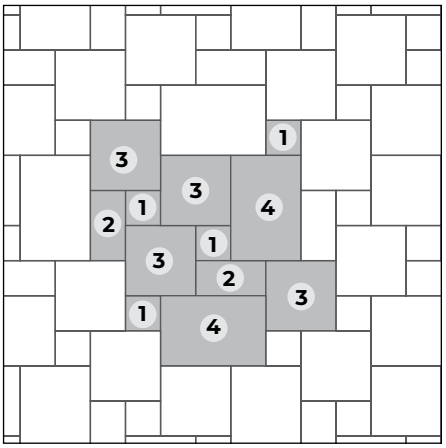

*All images are for reference only and may not match physical product exactly. Shading and variation is inherent in ceramics and natural stone. Please inspect all products before installing, no claims accepted after installation.*

# Pattern Inspiration

Laying with leveling spacers (wedges) to lay floors and wall coverings using formats with sides greater than 60 cm, Cerdomus recommends the use of leveling spacers that allow the surface to be perfectly flat, keeping each tile in place and reducing laying time.

We recommend laying tiles taking them alternately from different boxes, spreading them across 4 square meters on the ground to check the overall effect; shade variation is a special tile feature. During laying, we recommend a 2 mm grout joint and the use of leveling spacers. For smoothed tiles, we recommend exercising caution in handling and laying operations. Once laid, we recommend protecting the floor until all other construction work is completed. Tiles with smooth or satin surface may, with time, undergo slight variations in color and gloss, which give them a natural distressed look.

To enhance the effect of shaded materials it is recommended to alternate items from different boxes while laying. When laying ground products it is advisable to use a self-levelling floor plaster with joints of not less than 2 mm. Cerdomus S.r.l. do not accept responsibility for defects resulting from the incorrect laying of materials. Maximum care should be taken when handling and laying polished products, in particular avoiding rubbing the tiles against each other. When laying is complete it is advisable to protect the floor with cardboard up until completion of building work on the site. Owing to the special nature of these tiles we recommend that you quickly wipe the tiles with special detergents after grouting.



*All images are for reference only and may not match physical product exactly. Shading and variation is inherent in ceramics and natural stone. Please inspect all products before installing, no claims accepted after installation.*