

SOLIDA SERIES









SOLIDA THROUGH BODY PORCELAIN | MATTE RECTIFIED













For more info, visit: www.amestile.com/solida






Grey



Anthracite Black

SOLIDA SERIES

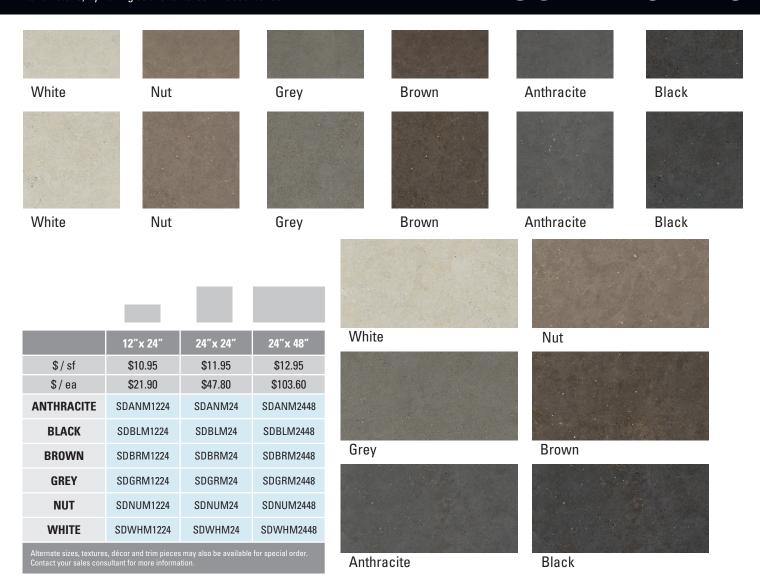

RECOMMENDED APPLICATIONS												
		Shower	Steam Shower	Light Commercial	Medium Commercial	Heavy Commercial	Indoor	Outdoor				
Matte	WALL	✓	✓	✓	✓	✓	✓	✓				
	FLOOR	✓	✓	✓	✓	✓	✓	No				

Recommended applications do not include consideration of any technical installation requirements or any safety standards for outdoor use. All tile products and setting materials should be selected and installed in compliance with manufacturers specifications and applicable use standards.

TECHNICAL SPECIFICATIONS												
V Rating (Variation)	Breaking Strength (ISO 10545-4)	Resistance to Deep Abrasion (ISO 10545-6)	Slip Resistance	Frost Resistance (ISO 10545-12)	Country of Origin	Ecotile						
V2 Slight Variation	≥1300N	145mm3	DCOF ≥0.42, R10	Yes	Italy	Yes						
Number of Faces	Thickness	Resistance to Surface Abrasion	Moisture Rating	MOHS	PEI	Recycled						
		(ISO 10545-7)	(MR)	(Hardness Scale)	(Wear Resistance)	Content						

All images are for reference only and may not match physical product exactly. All sizing is nominal and all product specifications are supplied by the manufacturer and are subject to change by the manufacturer without notice to you or to Ames Tile & Stone Ltd. Ames makes no representations or warranties as to the specifications of any product. Prices are subject to change without notice; please contact your Ames Sales Consultant for current prices.

