Tube Through Body Porcelain Rectified | Matte

An industrial spin on a design inspired by London's famed Tube stations.






RETAIL PRICING LISTED

| Stocked Sizes | Price /sf | Price /pc | |
|------------------------------------|-----------|-----------|--|
| 24"x 24" | \$11.95 | \$47.80 | |
| 24"x 48" | \$14.95 | \$119.60 | |
| 120cm x 260cm / 47"x 102" Slabs | \$26.98 | \$905.52 | |





Through Body Porcelain Rectified | Matte









Brown

Black






| | 24"x 24" | 24"x 48" | 120 cm x 260 cm 47" x 102" Matte Slabs | |
|---------|----------|-----------|--|--|
| \$/sf | \$11.95 | \$14.95 | \$26.98 | |
| \$ / ea | \$47.80 | \$119.60 | \$905.52 | |
| Black | TUBLM24 | TUBLM2448 | TUBL120260 | |
| Brown | TUBRM24 | TUBRM2448 | TUBR120260 | |
| Grey | TUGRM24 | TUGRM2448 | TUGR120260 | |
| White | TUWHM24 | TUWHM2448 | TUWH120260 | |

All sizes are approximate and items are sold by piece. Caution: Dark grout on light coloured tiles can scratch or stain the surface, please test a separate area before grouting your space.

Recommended Applications -

W-Wall F-Floor

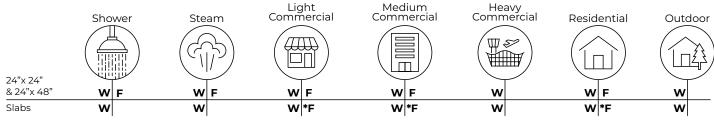

* Only for use on concrete substrates

Recommended applications do not include consideration of any technical installation requirements or safety standards for slopes and pool decks. All tile products and setting materials should be selected and installed in compliance with manufacturers specifications and applicable use standards.

Technical Specifications

Product specifications are supplied by the manufacturer and are subject to change without notice.

| V Rating (Variation) | Breaking Strength (ISO 10545-4) | Resistance to Deep Abrasion (ISO 10545-6) | Slip Resistance | Frost Resistance (ISO 10545-12) | Country of Origin | Ecotile |
|--|------------------------------------|---|----------------------|------------------------------------|--------------------------|------------------------|
| V2 - Slight Variation | ≥45 N/mm² | <140 mm³ | DCOF ≥0.42, R9 | Yes | Italy | Yes |
| Number of Faces | Thickness | Resistance to Surface Abrasion (ISO 10545-7) | Moisture Rating (MR) | MOHS (Hardness Scale) | PEI (Wear Resistance) | Recycled Content |
| 40 - Black & Brown 35 - Grey & White 6 - Slabs | 10mm 6.5mm (Slabs) | _ | 1 - Impervious | _ | 3 (24x24 & 24x48) | Pre-Consumer - 7.5% |

Ames makes no representations or warranties as to the specifications of any product. Prices are subject to change without notice; please contact your Ames Sales Consultant for current prices.

